

E70




With the E-70 wind turbine ENERCON continues its longstanding reputation for reliability in the 2 MW class. Especially suitable for sites with high wind speeds, the E-70 wind turbine – with 2.3 MW rated power and numerous steel and precast concrete tower versions – is designed to ensure maximum yield in the upper power range.

TECHNICAL DATA

Rated power:	2,300 kW
Rotor diameter:	71 m
Hub height:	58–113 m
Wind class (IEC):	IEC/NVN I
Turbine concept:	Gearless, variable speed, variable pitch control
Rotor	
Type:	Upwind rotor with active pitch control
Direction of rotation:	Clockwise
Number of blades:	3
Swept area:	3,959 m ²
Blade material:	Fibreglass (epoxy resin); integrated lightning protection
Rotational speed:	Variable, 6–21.5 rpm
Pitch control:	ENERCON blade pitch system, one independent pitching system per rotor blade with allocated emergency supply
Drive train with generator	
Hub:	Rigid
Main bearings:	Dual-row tapered/single-row cylindrical roller bearings
Generator:	ENERCON direct-drive synchronous annular generator
Grid feeding:	ENERCON converter
Braking systems:	– 3 independent blade pitch systems with emergency supply – Rotor brake – Rotor lock
Yaw control:	Active via adjustment gears, load-dependent damping
Cut-out wind speed:	28–34 m/s (with ENERCON storm control)
Remote monitoring:	ENERCON SCADA

Details – ENERCON Storm Control – (see last page)

CALCULATED POWER CURVE

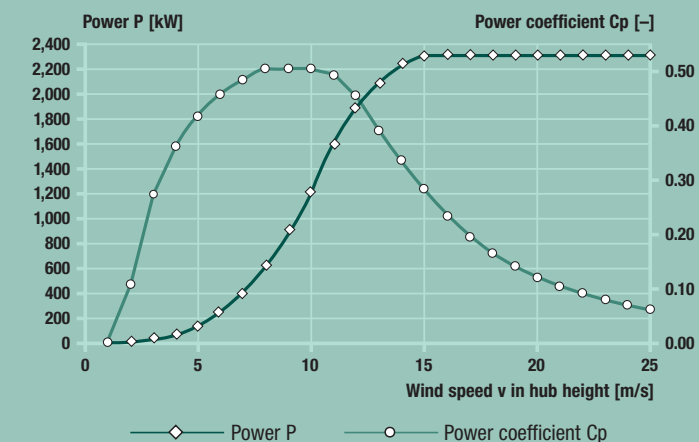

Wind [m/s]	Power P [kW]	Power coefficient Cp [-]
1	0.0	0.00
2	2.0	0.10
3	18.0	0.27
4	56.0	0.36
5	127.0	0.42
6	240.0	0.46
7	400.0	0.48
8	626.0	0.50
9	892.0	0.50
10	1,223.0	0.50
11	1,590.0	0.49
12	1,900.0	0.45
13	2,080.0	0.39
14	2,230.0	0.34
15	2,300.0	0.28
16	2,310.0	0.23
17	2,310.0	0.19
18	2,310.0	0.16
19	2,310.0	0.14
20	2,310.0	0.12
21	2,310.0	0.10
22	2,310.0	0.09
23	2,310.0	0.08
24	2,310.0	0.07
25	2,310.0	0.06

ρ = 1.225 kg/m³

Details – ENERCON power curve – (see last page)